

# OFFICE OF THE MARION COUNTY SURVEYOR

## SECTION RECORD CORNER

SECTION 32 TOWNSHIP 17 RANGE 3

DATE: 4-8-05

PARTY CHIEF: Wilcoxon

CREW: \_\_\_\_\_

TYPE OF MARKER: Harrison set

METHOD OF ESTABLISHMENT: County: 4-24-03


IN. S.P.C. E ZONE NAD '83

NAME: 17033208

N: 512995.1111(m)


E: 53296.2611(m)

NOTE: This corner position represents a title corner and may not necessarily be in the position of the Record corner.

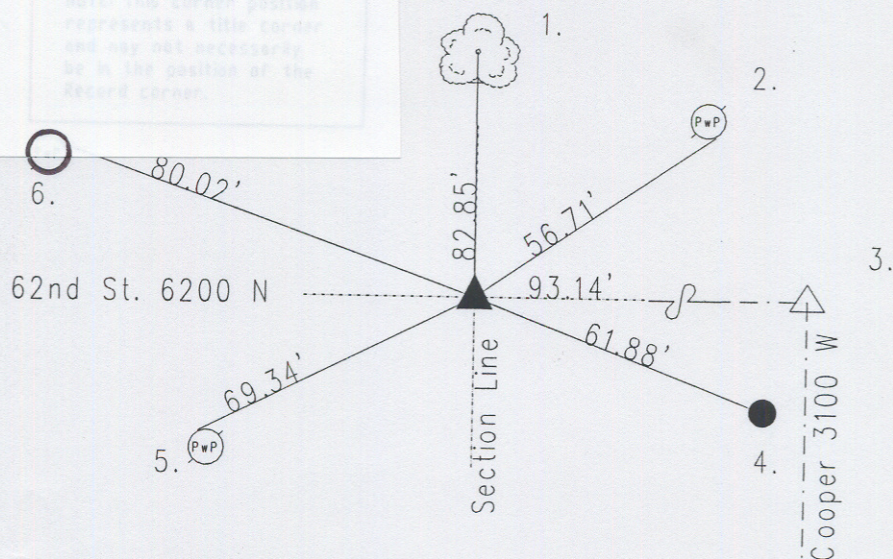

62nd St. 6200 N

Cooper Rd 3100 W



Corner originally set as a post in 1820 by Wm. B. Laughlin with the following witnesses: 14"ash bearing north 33 degrees, thence west 22 links; and a 20" elm bearing north 55 degrees, thence east 13 links.(M.C. Atlas p. 11)A survey by D.B. Hasbrook on September 18,1854 indicates a rock set with the following witnesses: 30" ash bearing north 40 degrees, thence east 19 links; and a 20" oak bearing north 39.50 degrees, thence west 92 links.(Pike Legal Book p. 38) Corner was excavated on 4/24/03 by Wilcoxon and a r.r. spike was set at surface. Corner excavated by Wilcoxon on 4/5/05 and a r.r. spike was found 2" down. No other points were found . A# 205 cast iron Harrison Monument was set in position as the corner.

17033208

REF.	DISTANCE	DESCRIPTION
1.	82.85'	Boat spike F 6" elm 3"up
2.	56.71'	Mag nail w/brass washer SF PwP#1-300 A 15"up
3.	93.14'	Due E to C/I of Cooper 3100 W
4.	61.88'	Mag nail w/bw N wooden post (leaning west) 12"up
5.	69.34'	Mag nail w/bw NW PwP#108-300 A 12"up
6.	80.02'	Mag nail w/bw NF PwP#396-300 A 18"up